



*

Membranventil Typ 317 PVC-U Mit Flanschen PVC-U metrisch


Ausführung:

- Dichtfläche: flach
- Baulänge nach EN 558
- Anschlussmasse nach ISO 7005 PN 10, EN 1092 PN 10, DIN 2501 PN 10, BS 4504 PN 10

Option:

- Abschliessbares Handrad DN65 (Standardausführung nicht abschliessbar)

* DN80, DN100 und DN150 mit Festflansch metrisch und Zoll ANSI B16.5

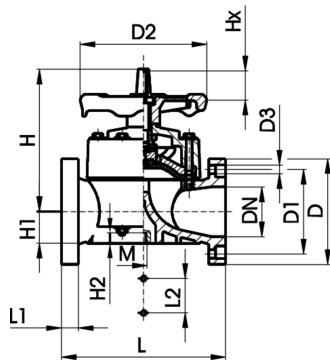

DN 80-100

d (mm)	DN (mm)	Zoll (inch)	PN (bar)	kv-Wert ($\Delta p=1$ bar) (l/min)
75	65	2 1/2	10	992
* 90	80	3	10	1700
* 110	100	4	6	2700
* 160	150	6	6	6033

d (mm)	NBR Code	EPDM Code	PTFE mit EPDM Stützmembrane Code	FKM Code	SP	Gewicht (kg)
75	161 317 508	161 317 523	161 317 538	161 317 568	1	5.090
* 90	161 317 009	161 317 024	161 317 039	161 317 069	1	9.700
* 110	161 317 010	161 317 025	161 317 040	161 317 070	1	13.600
* 160	161 317 012	161 317 027	161 317 042	161 317 072	1	27.000

d (mm)	D (mm)	D1 (mm)	D2 (mm)	D3 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	M	Hub = Hx (mm)	AL
75	185	145	152	18	201	46	15	290		70		M8	30	4
* 90	200	160	270	18	265	57	23	310	35	120		M12	40	8
* 110	225	180	270	18	304	69	23	350	35	120		M12	50	8
* 160	285	240	400	23	437	108	23	480	26	100	200	M12	70	8

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>