


PROGEF Standard Rückschlagventil Typ 561
Ohne Feder
Mit Stumpfschweisssutzen IR-Plus SDR11 metrisch

Ausführung:

- Material: PP-H
- Ventil ist dicht ab einer Wassersäule von 2m
- Leicht ein- und ausbaubar
- Vibrationsfrei auch bei hohen Durchflussgeschwindigkeiten
- Strömungsoptimierter Rückschlagkegel, zweifach geführt
- Vertikaler Einbau
- Gleiche Einbaumasse wie Kugelhahn Typ 546
- Z-Mass, Anschlussstiel und Überwurfmutter sind **nicht kompatibel** zu Typ 360
- Neu DN65-DN100

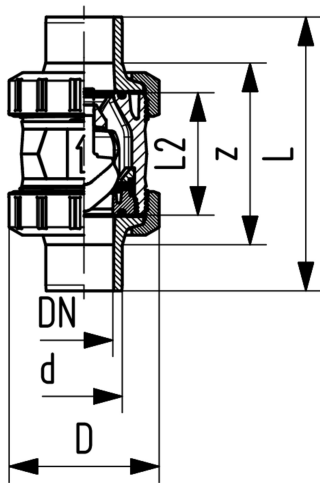

d	DN	Zoll	PN	kv-Wert	SDR	EPDM	SP	Gewicht
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)		Code		(kg)
				(l/min)				
20	15	½	10	180	11	167 561 082	1	0.080
25	20	¾	10	380	11	167 561 083	1	0.170
32	25	1	10	460	11	167 561 084	1	0.203
40	32	1 ¼	10	850	11	167 561 085	1	0.340
50	40	1 ½	10	1080	11	167 561 086	1	0.523
63	50	2	10	1670	11	167 561 087	1	0.989
75	65	2 ½	10	2950	11	167 561 088	1	2.350
90	80	3	10	3600	11	167 561 089	1	3.660
110	100	4	10	4150	11	167 561 090	1	5.810

d	FKM	SP	Gewicht	D	L	L2	e	closest
(mm)	Code		(kg)	(mm)	(mm)	(mm)	(mm)	inch
								(inch)
20	167 561 092	1	0.080	50	130	56	1.9	½
25	167 561 093	1	0.180	58	143	65	2.3	¾
32	167 561 094	1	0.190	68	150	71	2.9	1
40	167 561 095	1	0.340	84	171	85	3.7	1 ¼
50	167 561 096	1	0.490	97	191	89	4.6	1 ½
63	167 561 097	1	1.027	124	220	101	5.8	2
75	167 561 098	1	2.360	166	266	136	6.8	2 ½
90	167 561 099	1	3.680	200	264	141	8.2	3
110	167 561 100	1	5.830	238	301	164	10.0	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>