


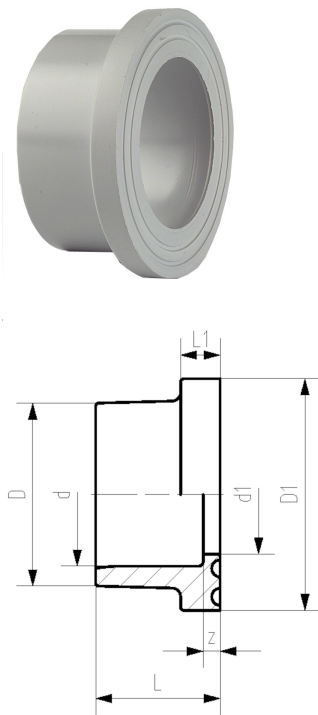

Bundbuchse PVC-C

Kombi-Dichtfläche flach und gerillt metrisch

Ausführung:

- Dichtung: Flachdichtung EPDM Nr. 748 400 306-320
- Dichtung: Profil-Flanschdichtung EPDM Nr. 748 440 706-720, FPM Nr. 749 440 706-720
- Flansche (metrisch & ANSI): PVC-U, PP-V, PP/Stahl

Anmerkung:

* Rohr benötigt eventuell Fase bei Anwendung mit Absperrklappe Typ 037/038/039

d	DN	PN	Code	SP	Gewicht	D	D1	d1	L	L1	z
(mm)	(mm)	(bar)			(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
20	15	16	723 790 106	10	0.011	27	34	16.0	21	6	3
25	20	16	723 790 107	10	0.018	33	41	21.0	24	7	3
32	25	16	723 790 108	10	0.027	41	50	28.0	27	7	3
40	32	16	723 790 109	10	0.032	50	61	36.0	30	8	3
50	40	16	723 790 110	10	0.054	61	73	45.0	34	8	3
63	50	16	723 790 111	10	0.097	76	90	57.0	41	9	3
75	65	16	723 790 112	10	0.168	91	106	69.0	47	10	3
90	80	16	723 790 113	10	0.265	108	125	81.8	56	11	5
110	100	16	723 790 114	10	0.441	131	150	101.5	66	12	5
*	160	150	723 790 117	12	1.139	188	213	152.0	91	16	5
225	200	10	723 790 120	2	1.860	248	274	217.0	125	25	6

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>